How to change fuel filter on **Opel Astra G F48** – replacement guide

VIDEO TUTORIAL




Important!

This replacement procedure can be used for:
OPEL Corsa B Hatchback (S93) 1.2 i (X 12 SZ, C 12 NZ), OPEL Corsa B Hatchback (S93) 1.4 i (F08, F68, M68), OPEL Corsa B Hatchback (S93) 1.4 Si (F08, F68, M68), OPEL Corsa B Hatchback (S93) 1.6 GSI 16V (F08, F68, M68), OPEL Omega B Saloon (V94) 2.0 (F69, M69, P69), OPEL Omega B Saloon (V94) 2.0 16V (F69, M69, P69), OPEL Omega B Saloon (V94) 2.5 V6 (F69, M69, P69), OPEL Omega B Saloon (V94) 3.0 V6 (F69, M69, P69), OPEL Omega B Caravan (V94) 2.0 (F35, M35, P35), OPEL Omega B Caravan (V94) 2.0 16V (F35, M35, P35), OPEL Omega B Caravan (V94) 2.5 V6 (F35, M35, P35), OPEL Omega B Caravan (V94) 3.0 V6 (F35, M35, P35), OPEL Corsa B Hatchback (S93) 1.4 i 16V (F08, F68, M68), OPEL Corsa B Hatchback (S93) 1.6 i 16V (F08, F68, M68), OPEL Combo B Van 1.2, (+ 172)

The steps may slightly vary depending on the car design.

REPLACEMENT: FUEL FILTER – OPEL ASTRA G F48. TOOLS YOU MIGHT NEED:

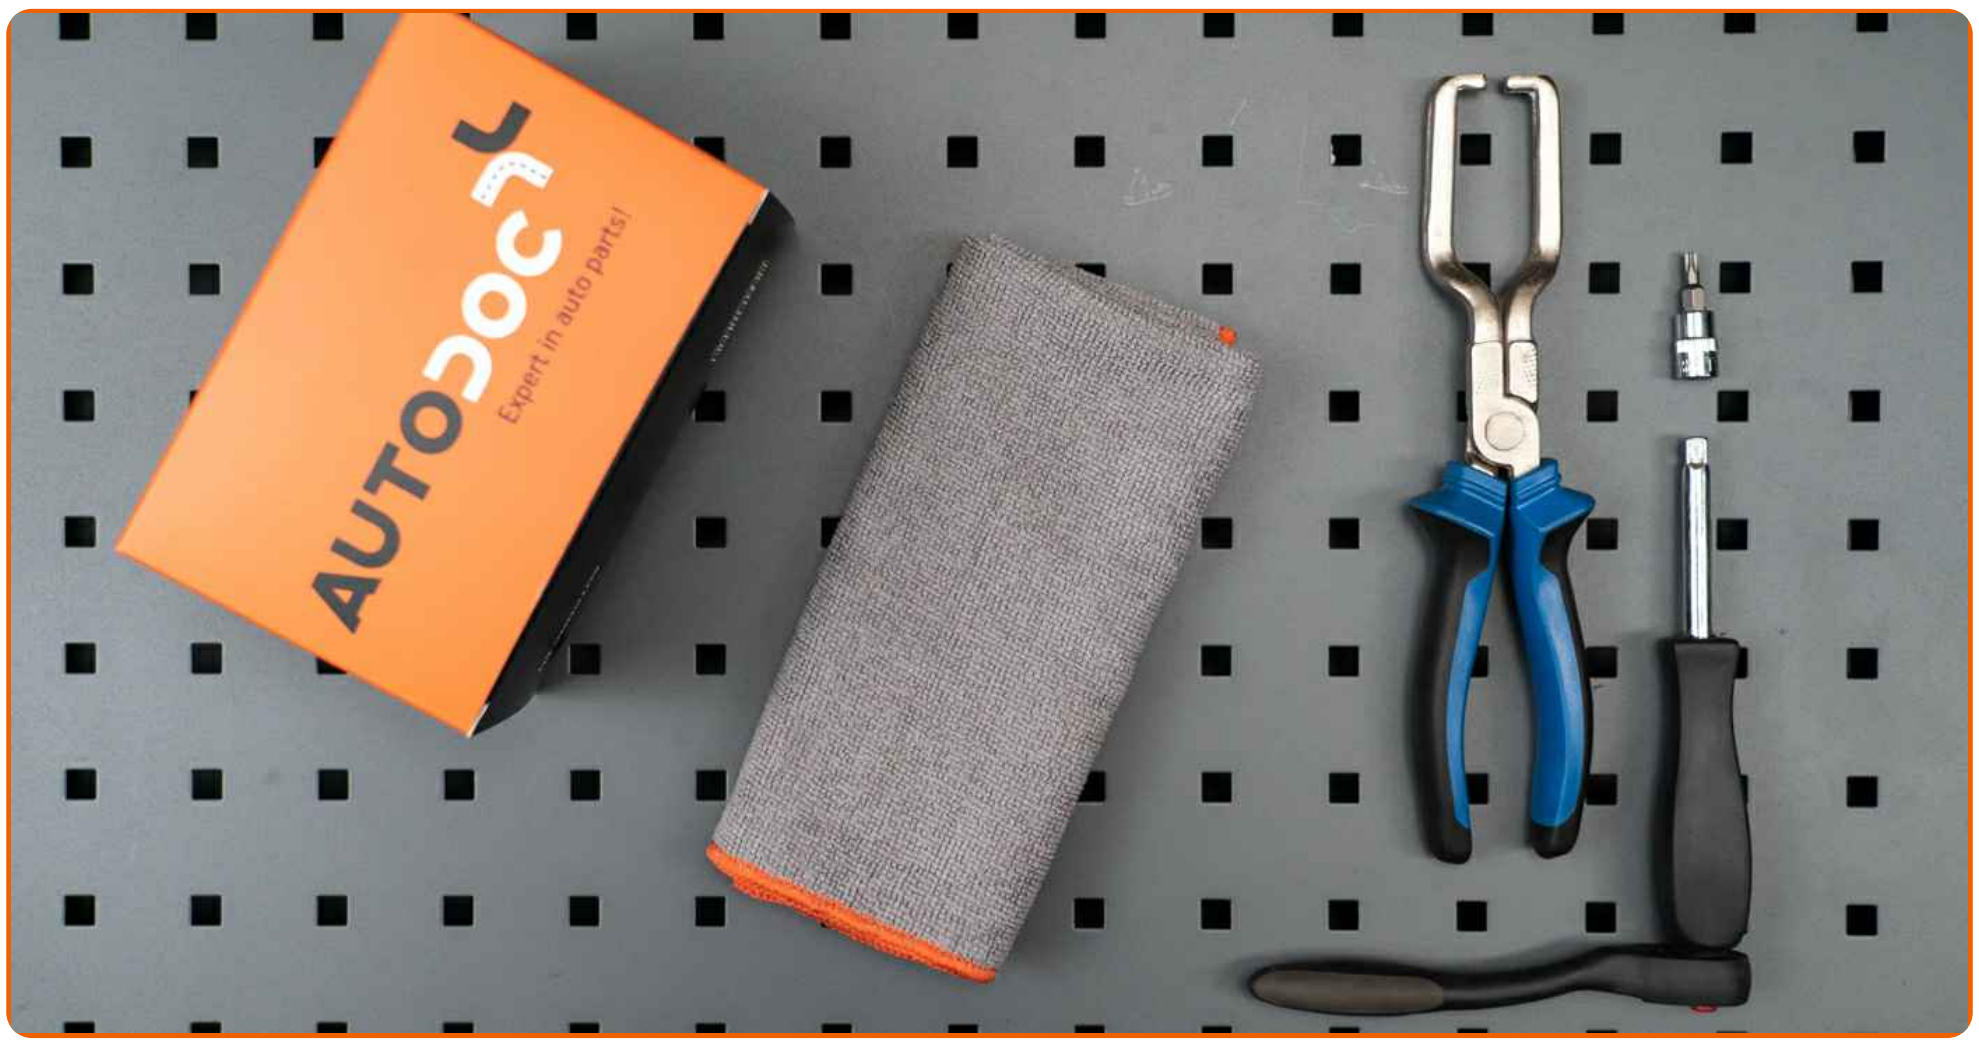

- Torx bit T20
- Fuel line pliers
- Fluid container

BUY TOOLS

Replacement: fuel filter – Opel Astra G F48. Tip from AUTODOC:

- Ensure adequate ventilation of the workplace. Fuel vapors are poisonous.
- All work should be done with the engine stopped.

REPLACEMENT: FUEL FILTER – OPEL ASTRA G F48. TAKE THE FOLLOWING STEPS:

1

Open the fuel door. Unscrew the fuel filler cap.



2

Lift the car using a jack or place it over an inspection pit.




3

Prepare a container for fluids.



4

Squeeze the clips and detach the fuel supply lines from the fuel filter housing. Use fuel line pliers.

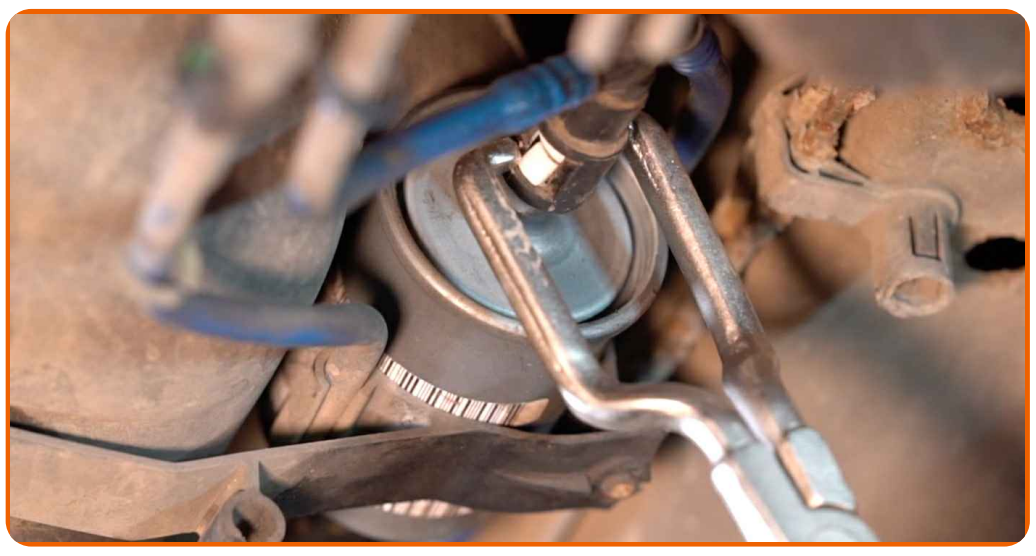

Replacement: fuel filter – Opel Astra G F48. AUTODOC recommends:

- Be careful! Fuel may leak from the filter housing and hoses.


5

Loosen the fuel filter mounting. Use Torx T20.



6

Remove the fuel filter. Put the old filter cartridge in the container.

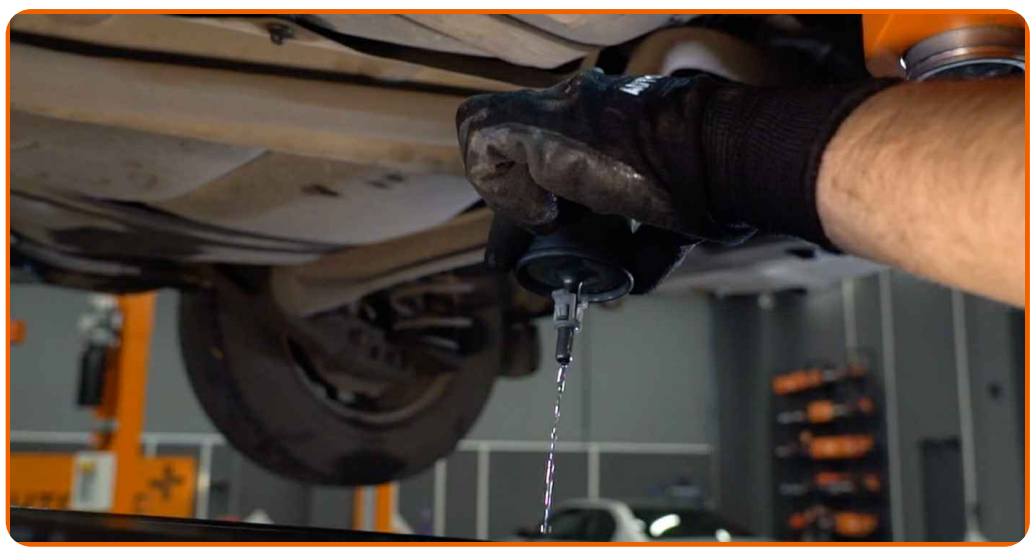

7

Remove the retainers of the fasteners of the fuel filter tubes.




8 Install the retainers of the fasteners of the fuel filter tubes.



9 Install a new fuel filter.



10 Tighten the fuel filter fasteners. Use Torx T20.

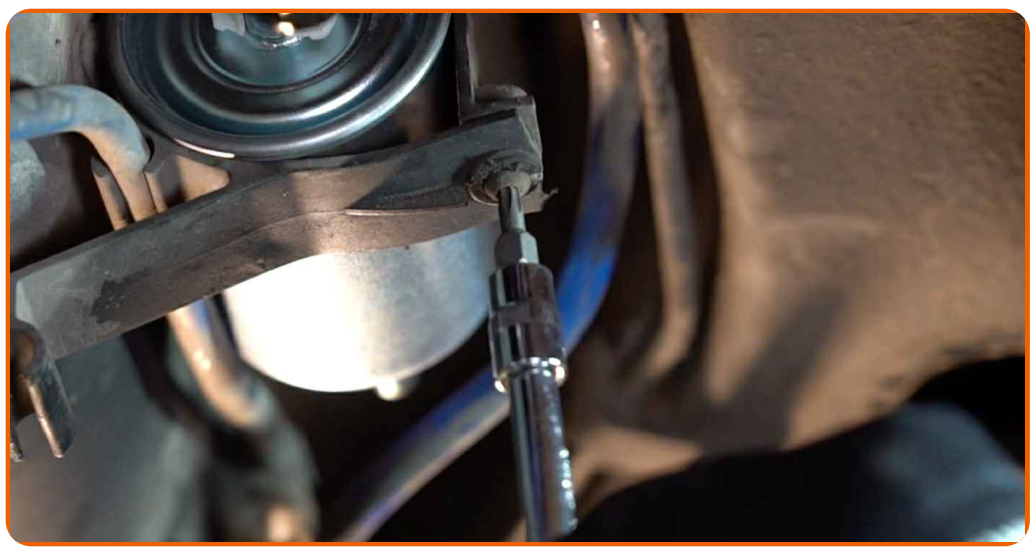

Replacement: fuel filter – Opel Astra G F48. Tip:

- Remember, it is important not to mix up the input and output of the filter. Arrows on the filter indicate the direction of fuel flow.
- During installation, take care to prevent dust and dirt from getting into the fuel filter housing.
- Take care to only use quality filters.

11 Connect the fuel lines to the fuel filter and lock the fastening clips.



12 Lower the car.




13 Tighten the fuel filler cap. Close the fuel door.



Replacement: fuel filter – Opel Astra G F48. Professionals recommend:

- Before starting off, switch the ignition on and off several times. This should be done to activate the fuel pump to make it pump fuel through the fuel system.

14 Run the engine for a few minutes. This is necessary in order to make sure that the component operates properly.

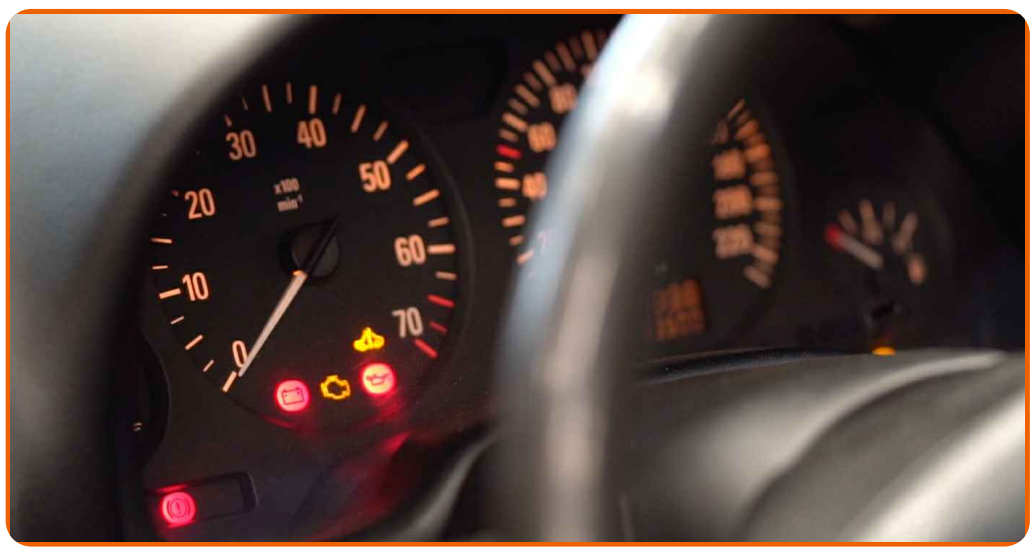

Replacement: fuel filter – Opel Astra G F48. Tip from AUTODOC:

- To protect the environment from pollution, be sure to dispose of the used filters at special collection points.

WELL DONE!

VIEW MORE TUTORIALS

AUTODOC — TOP QUALITY AND AFFORDABLE CAR PARTS ONLINE

CHOOSE CAR PARTS FOR OPEL ASTRA G F48

FUEL FILTER FOR OPEL: BUY NOW

FUEL FILTER FOR OPEL ASTRA G F48: THE BEST DEALS & OFFERS

ⓘ DISCLAIMER:

The document contains only general recommendations that may be useful for you when you perform repair or replacement work. AUTODOC shall not be liable for any loss, injury, damage of property occurring in the repair or replacement process due to incorrect use or misinterpretation of the provided information.

AUTODOC shall not be liable for any possible mistakes and uncertainties in this guide. The information provided is for information purposes only and cannot replace advice from specialists.

AUTODOC shall not be liable for incorrect or hazardous usage of equipment, tools and car parts. AUTODOC strongly recommends to be careful and observe the safety rules when performing repair or replacement works. Remember: usage of low quality auto parts does not guarantee you the appropriate level of road safety.